


55 mm x 100 mm x 21 mm FAG 20211-K-TVP-C3 Spherical Roller Bearings

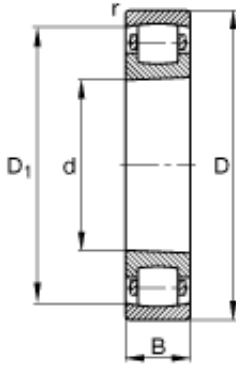

Bearing No. 20211-K-TVP-C3

20211-K-TVP-C3 Bearing 2D drawings and 3D CAD models

| | |
|--------------------|--|
| Size | 55x100x21 mm |
| Bore Diameter | 55 mm |
| Outer Diameter | 100 mm |
| Width | 21 mm |
| d | 55 mm |
| D | 100 mm |
| B | 21 mm |
| D ₁ | 89,2 mm |
| D _{a max} | 91 mm |
| d _{a min} | 64 mm |
| r _{a max} | 1,5 mm |
| r _{min} | 1,5 mm |
| m | 0,642 kg / Weight |
| C _r | 73500 N / Dynamic load rating (radial) |
| C _{0r} | 85000 N / Static load rating (radial) |
| n _G | 7100 1/min / Limiting speed |
| C _{ur} | 8700 N / Fatigue limit load, radial |
| Size | 55x100x21 mm |
| Bore Diameter | 55 mm |
| Outer Diameter | 100 mm |
| Width | 21 mm |
| d | 55 mm |
| | |



NTN BEARING USA CORP.

| | |
|-------------------------------|----------|
| D | 100 mm |
| B | 21 mm |
| C | 21 mm |
| r min. | 1,5 mm |
| D1 | 89,2 mm |
| da min. | 64 mm |
| Da max. | 91 mm |
| ra max. | 1,5 mm |
| Weight | 0,642 Kg |
| Basic dynamic load rating (C) | 73,5 kN |
| Basic static load rating (C0) | 85 kN |
| Fatigue load limit (Pu) | 9,3 |